


Full, empty and demand indicator
for any mounting position
large range of applications

Signal contact 2 A / 250 V AC potential-free
Type of protection IP66 in accordance with DIN EN 60529
Maintenance none


3

A3 or A4
Round housing
Order code
DF21AnCnG3EM2V

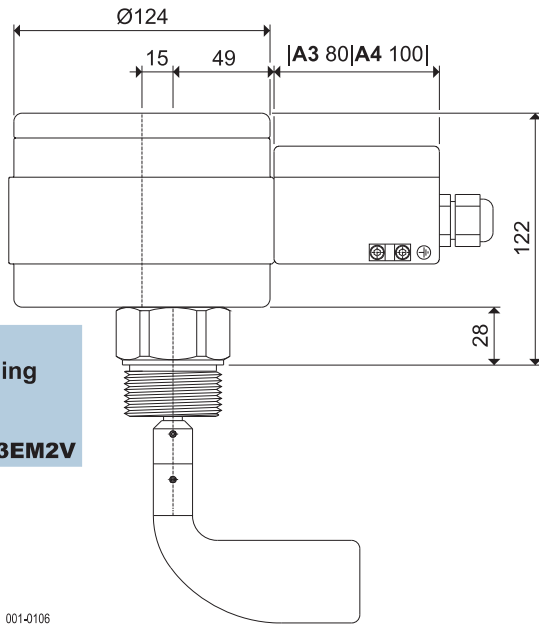


001-0106

A1 or A2
Compact housing
Order code
DF21AnCnG3AM2V

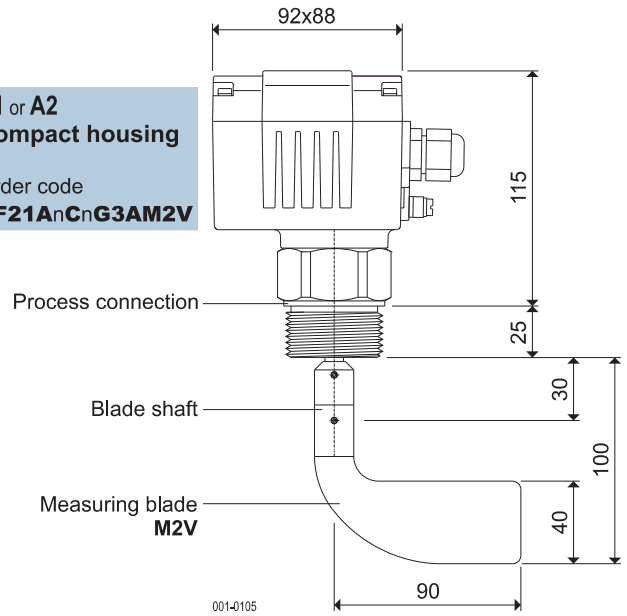


You will find further technical details
under appliance information **DF-GI-**

LW
Shaft extension

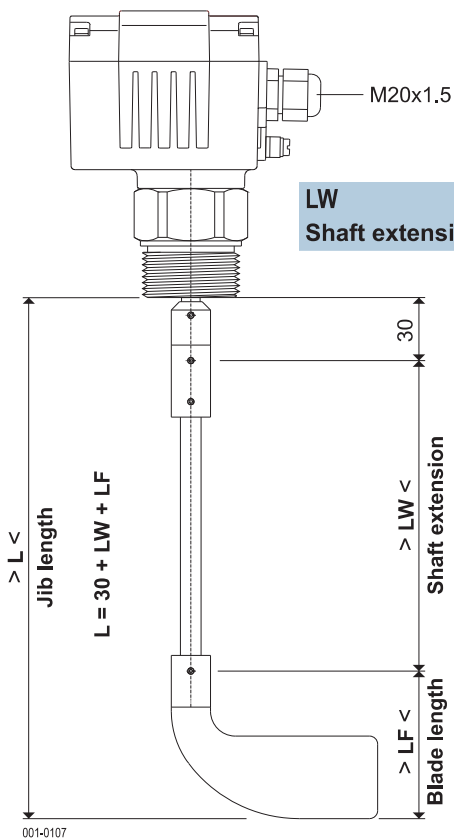

001-0107

E1, E2, E3 or E4
Temperature decoupling bell housing
(Extension for control head protection against overheating.)

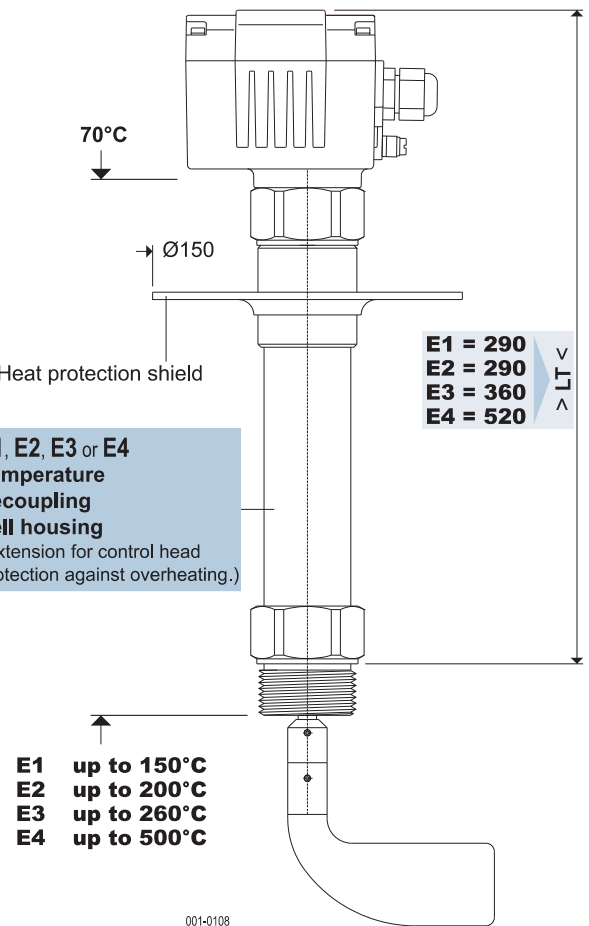

001-0108