

AC VOLTAGE METER

ANALOGUE METER

Light Star

MODEL & SUFFIX CODE

KAB-□ Type

Size

TYPE	W × H × D × φ
45	45 × 42 × 35 × 38
50	51 × 49 × 36 × 45
60	62 × 62 × 40 × 52
68	80 × 66 × 37 × 52
80	80 × 80 × 43 × 65

TYPE	W × H × D × φ
81	100 × 83 × 43 × 65
08	80 × 80 × 82 × 65
11	110 × 110 × 87 × 100




Ordering Information

ex) KAB-45 150V


KAB-11 600V

KAB-80 300V

SPECIFICATIONS

Type	KAB-45	KAB-50	KAB-60	KAB-68	KAB-80	KAB-81	KAB-08	KAB-11
Principle	→ 							
Accuracy	2.5% FS					1.5% FS		
Input	600V, 300V, 150V, 18V Etc							
With P.T	220, 380, 440, 3300, 6600, 13200, 22000, 22900/110V Etc							
Loss of Input	1VA	1VA	1VA	1VA	1VA	1VA	1VA	1VA
Weight	40g	50g	100g	110g	130g	140g	300g	400g

FOR CONNECTIONS

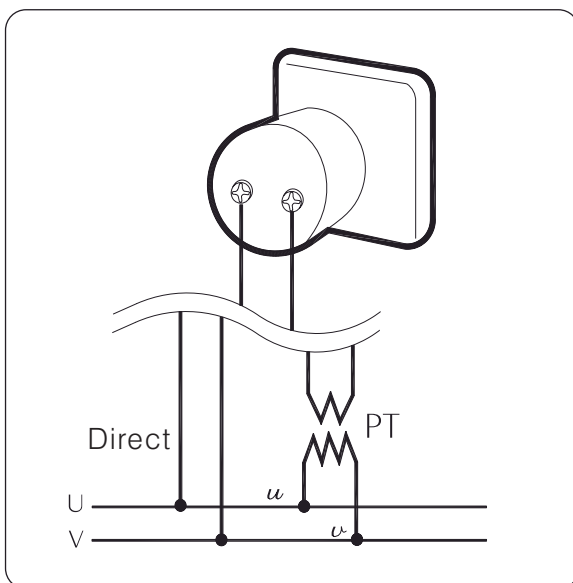

RED MARK METER

This meter can make the pointer for judging the proper direction to be moved right and left in the front part, and thus everyone can easily sense the normal operation status, and thus it is simple in the structure, is convenient to operate it, and is low and competitive in price.



KAB-08 type